

# IN05-A [QR]

Contactless ZK Ergani

QR Code Scanner for

Time & Attendance



ZKTeco launches IN05-A [QR], a contactless **ZK Ergani QR Code Scanner** for **Time & Attendance** with Linux and a newly integrated QR module. IN05-A [QR] incorporates ZK Ergani, a solution developed by ZKTeco Europe that allows you to punch using Ergani personal QR code.



## Contactless technology

QR code identification.



## Plug and Play

Thanks to its ease of installation, it allows the owner of the premises to focus on his business.



## Real-time

Enables real-times punches from Ergani QR codes.




## Security

Consumer confidentiality is guaranteed as no information is stored inside the devices.

# Specifications

<b>Product</b>		IN05-A
<b>Main</b>	Identification	QR Reader
	RF Optional	125kHz EM / 13.56MHz MF
<b>Capacity</b>	Max User(1:N)	1,0000
	Max Record	100,000
<b>Interface</b>	TCP/IP	10/100 M
	PoE Optional	802.3 at 28W
	Wi-Fi	802.11 B/G/N
	3G Optional	WCDMA
	USB	USB 2.0 (Host)
	RS232	1 port for external printer
	RS485	1 port
	Relay	2 relays
	Wiegand	1ch In & Out
<b>Hardware</b>	Input	1 Input
	LCD	2.8" Color LCD
	Sound	24-bit
	Operating Temp.	0 °C - 45 °C
	Operating Humidity	20% ~ 80%
	Power	DC 12V 3A
	Dimensions(W x H x D mm)	213*155*107.81 mm
Certificates	CE, FCC, RoHS	
<b>Function</b>	Standard	Automatic Status Switch, Self-Service Query, DST, T9 Input, 9 Digit User ID, Scheduled Bell, Photo ID, Lock, sensor, Exit button
	Optiona	ID / MF, ADMS

## Configuration

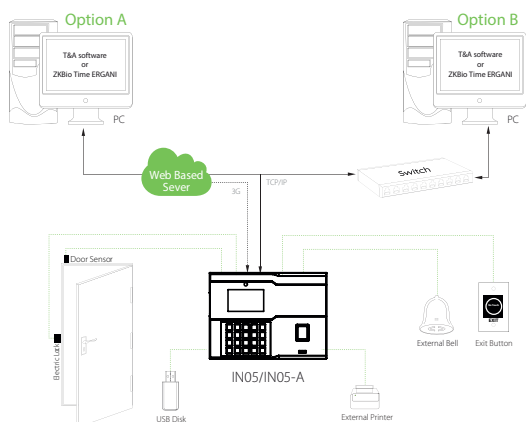

## Dimensions (mm)

