

DIGITAL DRIVE THRU MENU KIOSK

MODULAR DESIGN

Make Outdoor Display Easy



EASY Upgrade

EASY Installation

EASY Transportation

Technical Specifications

Panel

| | |
|----------------------------------|----------------------------------|
| Size | 55 |
| Active Display Area (H x V mm) | 1211 x 682 |
| Resolution | 1920 x 1080 |
| Aspect Ratio | 16 : 9 |
| Brightness | 4500 nits |
| Backlight Adjustment | Automatic (Ambient Light Sensor) |
| Viewing Angle | 178°/178° |
| Backlight Configuration | Direct LED |
| Operation Life (hours) | 50,000 |

Mechanical

| | |
|--------------------|--|
| Enclosure Material | Galvanized Steel + Aluminum |
| Finishing | Zinc Powder Coating + Fine Grain Powder Coating |
| Colour | Black (Ral 9005) |
| Glass | AG Coating Tempered Glass, Back Painted Pantone Black C |

Power

| | |
|-------------------|--------------------------------------|
| AC Input | 110~220VAC±10% , 50 / 60 Hz |
| Power Consumption | 330 w (1x1), 660 w (1x2), 990 w(1x3) |

Environment

| | |
|-----------------------|----------------------|
| IP Rating | IP 66 (Display unit) |
| Operating Environment | Fully Outdoor |
| Operating Temperature | -20°C~50°C |
| Operating Humidity | 5%~98% |
| Operating Altitude | ≤ 2000m |

Media

| | |
|----|---------|
| OS | HDMI In |
|----|---------|


Optional

| | | | | | |
|-------------------|----------|--------|---------|-----|------|
| Android | Computer | Camera | Speaker | NFC | RFID |
| Ultrasonic sensor | | | | | |


Mechanical



W x H x D 777 x 2000 x 257mm
Net Weight 105kg

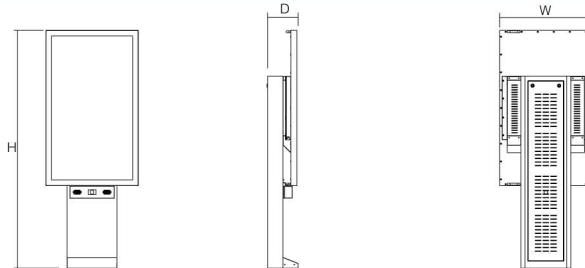

W x H x D 1555 x 2000 x 257mm
Net Weight 170kg

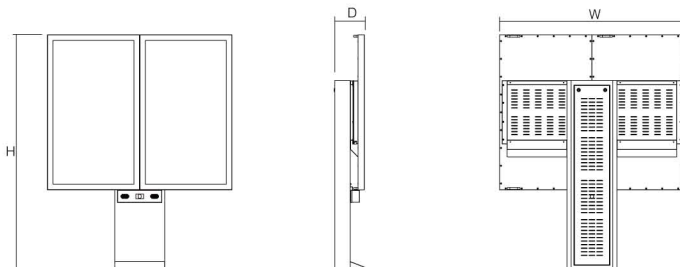

W x H x D 2333 x 2000 x 257mm
Net Weight 230kg

