



More than 30 multiple
media broadcasting modes

Perfect Visual & Lightning Touch

Side Door Internal Modularization

Bilateral Speaker Enhance Marketing Effect


FEATURES



165.7mm
6.5inch



144.2mm
5.7inch

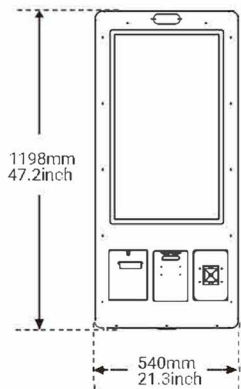

1198mm
47.2inch

540mm
21.3inch

| Product name | | Wall Mount Type |
|------------------|---------------------|---|
| OS Support | Operating System | Win 11 |
| | CPU | Intel Celeron i5 - 11generation |
| | System Memory | 8GB |
| | Disk | 128 SSD |
| | Speaker | 5W*2 |
| | Interface | USB*4/RJ45*1 |
| | Network | Ethernet/WIFI |
| Touch Screen | Type | PCAP 10 points |
| | Response Time | 10ms |
| LCD | Type | TFT-LCD (BOE) |
| | Contrast Ratio | 3000:1 |
| | Brightness | 400cd/m ² |
| | Response Time | 12ms |
| | Max Resolution | 1920x1080 |
| | Viewing Angle | H178° V178° |
| | Aspect Ratio | 16:9 |
| | Display Colors | 16.7m |
| | Refresh Rate | 60Hz |
| | Panel life | 3000 hours |
| Built-in Devices | Printer | 80mm thermal printer with auto cutter (EPSON TM-30II) |
| | Scanner | 2D, Area - Imaging scanner |
| | Camera | Optional |
| | Card Reader | Customer purchase |
| Power | Voltage | 100-240VAC, 50/60HZ |
| | Power Consumption | <220W |
| Enclosure | Material | SPCC |
| | Surface | Powder coaying |
| | Colour | Black or customized |
| | Overall Size(mm) | 1198x165.7x540 |
| | Package(mm) | 1320x270x760 |
| | Net Weight | 65KG |
| | Gross Weight | 73.8KG |
| Application | Application | Indoor |
| | Working Temperature | 0 ~40°C |
| | Storage Temperature | -20~60°C |
| | Working Humidity | 20%~80% |
| | Storage Humidity | 10%~90% |