

IDEAL SOLUTION FOR PORTABLE PRINTING

MOBILE PRINTER

LK-P22

- Durability emphasized structural design
- The highest printing speed in its class (100mm/s)
- Enhanced user convenience with 5-point indicator
- Supports the latest Bluetooth 4.2 technology
- Large roll capacity(Ø 40mm)
- Long battery life (1450mA)
- The size is smaller than cellphones
- Easy Bluetooth connection setting by using NFC function!




Made for
iPhone iPad



NFC

No more complicated Bluetooth connection setting!
Easy Bluetooth connection setting by using NFC function!
Equipped NFC capability for easier printer setting

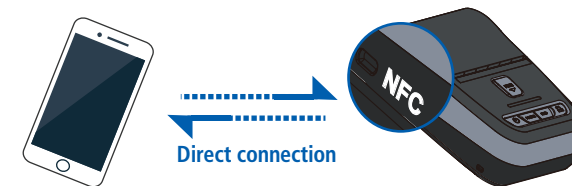

CRADLE

4 CRADLES IN 1 SET



1 power supply can be
charged up to 4 cradles in a set

SPECIFICATION

ITEM		TYPE
MODEL		LK-P22
PRINTING	METHOD	Direct Thermal
	SPEED	100mm / sec
DOT DENSITY		203 DPI
DOT PITCH		8dots /mm, 0.125 pitch
EFFECTIVE PRINTING WIDTH		48mm, 384dots/line
CHARACTER PER LINE		Font A(12 x 24) 32 columns Font B(9 x 17) 42 columns
PAPER	TYPE	Thermal Paper
	WIDTH	Max. 58mm
	THICKNESS	0.06mm
	ROLL DIAMETER	Max. Ø 40mm
	ROLL CORE INNER	12.5mm ± 0.5mm
RELIABILITY	TPH LIFE	50km
	PULSE ACTIVATION	50,000,000 pulse or more(12.5% Print Ratio)
CHARACTER SET	ALPHA NUMERIC CHARACTER	95
	EXTENDED GRAPHIC	128 x 18page(1 space page)
	INTERNATIONAL CHARACTER	14
BARCODE	1D	EAN-8,EAN8(+2+5), EAN-13, EAN13(+2+5), Codabar, Code11, Code39, Code93, Code128, ITF, LUPC-A(+2+5), UPC-E,UPC-E(+2+5), Planet, UPC-A etc.
	2D	QR, PDF417, MicroPDF417, Maxicode, Datamatrix, Aztec, RSS14, TLC39
FONTS		FontA(12x24), FontB(9x17), Asian Font(KOR,JPN, CHN_GB2312,CHN_BIG5), Font0/1/2/4/5/6/7, Resident TTF, Downloadable TTF, FontA~H, FontGS, Resident TTF(Font0), Font1 ~ 8
EMULATION		ESC/POS, CPCL, ZPL Command compatible
DRIVER		Windows Driver(10, 2012, 8, 7, 2008, VISTA, 2003, XP, 32bit & 64bit), Window CE & Mobile Driver & SDK(CE 4.2~, Mobile 5.0~), Linux Driver, Mac Driver, OPOS Driver, JavaPOS Driver, iOS SDK, Android(2.1~) SDK, Blackberry SDK, Symbian
SENSOR		Paper End, Cover Open, Black Mark
INTERFACE	STANDARD	USB
	OPTION	Bluetooth Smart Ready Ver 4.2 or Wi-Fi (802.11a/b/g/n)
BATTERY CHARGER		AC/DC Charger
BATTERY		7.4V 1450mAh Li-ion, 1.7Hrs Charging time, 36Hrs Stand-by
DIMENSION		80mm x 119.4mm x 44mm (W x D x H)
WEIGHT		242.5g (With Battery)
TEMPERATURE	OPERATION	-10 ~ 50°C
	STORAGE	-20 ~ 60°C
HUMIDITY	OPERATION	35 ~ 80%
	STORAGE	10 ~ 90%

• All specification and desings are subject to change without notice.

