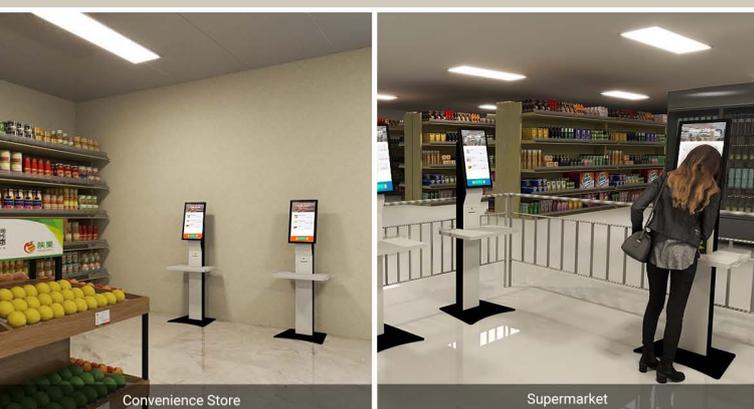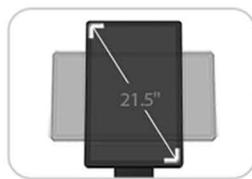# ICS

**ΚΑΡΑΦΥΛΛΗΣ ΣΥΣΤΗΜΑΤΑ ΠΛΗΡΟΦΟΡΙΚΗΣ**

# BROOKLYN
## 21" Self-check out kiosk

- Compatible with 21.5/27 inch touch screen
- 10 points PCAP touch
- Built-in scanner, built-in printer
- Support Ethernet & WiFi
- Options: card reader holder, camera

Convenience Store

Supermarket

**21.5 inch Moniter**
1080P HD display
10 points PCAP touch

**Option: Card Reader Holder**
Excl. card reader
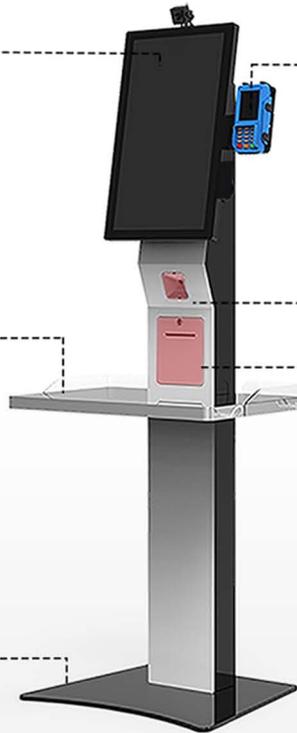Width 80-135mm

**Stainless Shelf**
With baffle & hooks

**Built-in Scanner**

**Solid Base**

**Built-in 80mm**
Thermal Printer With Auto Cutter

# SPECIFICATIONS

| OS Support | | | |
|---|---|---|---|
| Operating System | Windows10 | Rugged & durable metal construction | |
| CPU | i5-6200U | Stable free floor standing only | |
| System Memory | 8G | Support 21.5" screen on portrait mounting | |
| Disk | 128G | With stainless shelf for storage | |
| **Interface** | | | |
| Speaker | 5W*2 | | |
| Interface | USB*4/RJ45*1 | | |
| Network | Ethernet/WIFI | | |
| **Touch Screen** | | | |
| Type | Projective capacitive touch(10 points) | Response Time | 10ms |
| **LCD** | | | |
| Type | TFT-LCD | Contrast Ratio | 3000:1 |
| Screen Size | 21.5 inch | Response Time | 18ms |
| Max Resolution | 1920 x 1080 | Viewing Angle | H178° V178° |
| Aspect Ratio | 16 : 9 | Display Colors | 16.7M |
| Brightness | 300 cd/m² | Refresh Rate | 60Hz |
| Panel Life | 30000 hours | | |
| **Devices** | | | |
| Printer | Thermal printer with auto cutter. Paller roller 80*80mm | | |
| Scanner | 2D, area-imaging scanner | | |
| Card Holder | Customer provide | | |
| **Power** | | | |
| Voltage | 100-240VAC , 50/60Hz | Power Consumption | <40W |
| **Enclosure** | | | |
| Material | SPCC | Surface | Powder coating |
| Overall Size | L665×W480×H1630mm | Net Weight | 57kg |
| Package | L1640×W555×H285mm<br>L650×W450×H190mm (21.5 inch moniter) | Gross Weight | 53.5kg<br>10.5kg (21.5 inch moniter) |
| Colors | Front panel & base with glossy white. Side panel & back with glossy black | | |
| **Application** | | | |
| Working Temperature | 0～40℃ | Storage Temperature | -20～60℃ |
| Working Humidity | 20%～80% | Storage Humidity | 10%～90% |
| Application | Indoor | | |



178°



1630

665    480



**ICS**
ΚΑΡΑΦΥΛΛΗΣ ΣΥΣΤΗΜΑΤΑ ΠΛΗΡΟΦΟΡΙΚΗΣ