


## Stellar Series

Stellar-XMF 2.6"

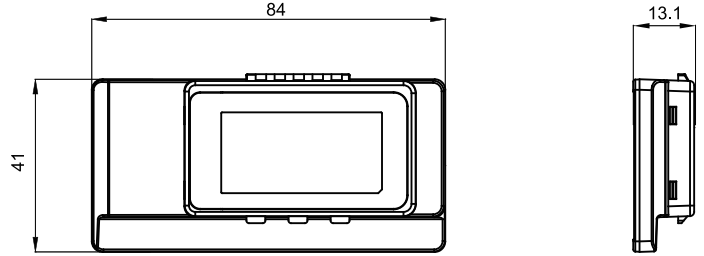

### TECHNICAL DETAILS

Stellar-XMF			
Product Dimensions (mm*mm*mm)	84*41*13.1		
Active Display Area(mm*mm)	60.1*30.7		
Weight (g)	36		
Case Color	Ice blue		
Display Size(inch)	2.6		
Resolution(pixel)	296*152		
DPI	125		
Display color	BW		
NFC	<p>"N"means the ESL with NFC function.</p> <ol style="list-style-type: none"> <li>1. Complies with ISO/IEC 14443 Type A standard</li> <li>2. Supports NFC NDEF data format with 200 bytes writable memory</li> <li>3. Communication distance is reachable maximum 10 mm</li> <li>4. Batch update of the same template</li> </ol>		
Multiple Pages	Supported 4 pages		
LED Flash	Red, Blue, Green		
Battery Life	5 years (4 updates per day)		
Battery Spec	1*950mAh		
Changeable Battery	Battery Pack		
Working Temperature (°C)	-25~0		
Storage Temperature (°C)	-25~30		
Working Humidity (%RH)	30~70		
Protection Level	IP67		
Certification	ROHS,CE,FCC,MIC		
RF Wireless Communicaiton Parameters	<table border="1"> <tr> <td>Working Frequency: 2402MHz ~ 2480MHz</td> <td>System Throughput: Up to 18,000 labels per hour</td> </tr> </table>	Working Frequency: 2402MHz ~ 2480MHz	System Throughput: Up to 18,000 labels per hour
Working Frequency: 2402MHz ~ 2480MHz	System Throughput: Up to 18,000 labels per hour		