

Mac32

Interactive self-service ordering kiosk



Application Scenarios



Product Features



• Metal construction



• Providing with scanner & printer; designed with space for fixing card reader or other modules




• Scanner



• Flip design of lockable front cover for easy maintenance



• Designed with two - channel speakers

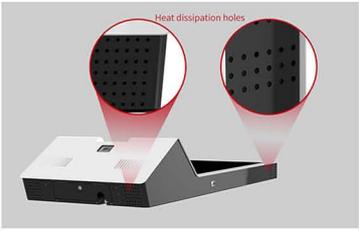

• Holes for heat dissipation



• For additional ports can be customized



• Three kinds of display ways for different applications

Product Parameters

OS Support			
OS Support	Windows10		
CPU	i3 6157U		
System Memory	8G		
Storage	128G		
Interface			
	USB*3	Card Reader Space: (not including card reader)	
	RJ45*1	Color:Front and back panel with glossy white	
	Network: RJ45 / WIFI	Side panel with glossy black	
Touch Screen			
Type	Projective capacitive touch(10 points)	Response time	10ms
LCD			
Type	TFT-LCD	Contrast Ratio	1100:1
Screen Size	32 inch	Response Time	10ms
Max Resolution	1920 x 1080	Viewing Angle	H178° V178°
Aspect Ratio	16 : 9	Display Colors	16.7M
Brightness	400 cd/m ²	Refresh Rate	60Hz
Panel Life	30000 hours		
Built-in Devices			
Printer	80mm thermal printer with auto cutter	Scanner	QR/barcode scanner
Power			
Voltage	100-240VAC , 50/60Hz	Power Consumption	<120W
Enclosure			
Material	SPCC	Surface	Powder coating
Net Weight	88kg(single screen flooring) 45kg(wall mounting)	Gross Weight	128kg(single screen flooring) 85kg(wall mounting)
Mounting	Floor Standing		
Application			
Working Temperature	0~40°C	Storage Temperature	-20~60°C
Working Humidity	20%~80%	Storage Humidity	10%~90%
Application	Indoor		

