

Floor standing kiosk

Manhattan

24" Self-Ordering kiosk




APPLICATIONS



Floor standing kiosk





Touchscreen
Support landscape or portrait mounting



Built-in Printer
80mm thermal printer with auto-cutter and front-open door



LED Atmosphere Lamp

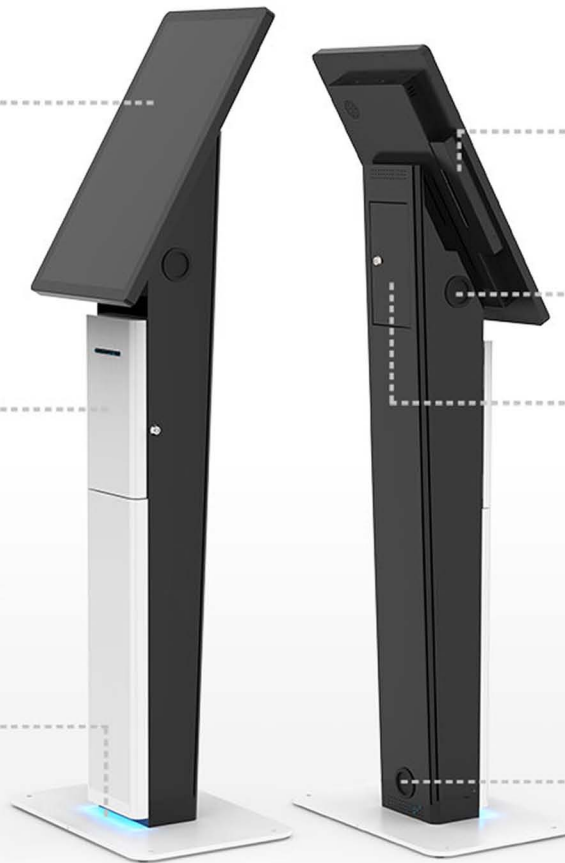

Cable Cover
Keep wires and switches from being damaged in public



Lockable Cable Compartment
For internal wiring



Wire Routing Hole

SPECIFICATIONS

OS Support				
Operating System	Windows10			
CPU	Intel Celeron J6412 quad-core 2.0G			
System Memory	8G			
Disk	128G			
Interface				
Speaker	5W*2	5W*2		
Interface	USB*4/RJ45*1	USB*2/RJ45*1		
Network	Ethernet/WIFI		Ethernet/WIFI	
Touch screen				
Type	PCAP 10points	Response time	10ms	
LCD				
Type	TFT-LCD	Contrast Ratio	3000:1	
Screen Size	24"	Response time	12ms	
Max Resolution	1920x1080	Viewing Angle	H178° V178°	
Aspect Ratio	16:9	Display Colors	16.7M	
Brightness	300cd/m2	Refresh Rate	60Hz	
Panel Life	30000 hours			
Built-in Devices				
Printer	Thermal printer with auto cutter. Paller roller 80*150mm		Scanner	2D with MSR reader
Power				
Voltage	100-240VAC , 50/60HZ	Power Consumption	<50W	
Enclosure				
Material	SPCC	Color: Front panel & base with glossy white. Side panel & back with glossy black		
Overall Size (mm)	L555×W375×H1634	Net Weight	43.5kg	
With vesa mounting holes 75x75, 100x100mm , Rugged & durable metal construction, Stable free floor standing only, Support 21.5"-27" screen on portrait mounting , Bottom with LED Atmosphere lamp				
Application				
Working temperature	0~40°C	Storage temperature	-20~60°C	
Working humidity	20%~80%	Storage humidity	10%~90%	
Application	Indoor			

