



Floor standing kiosk

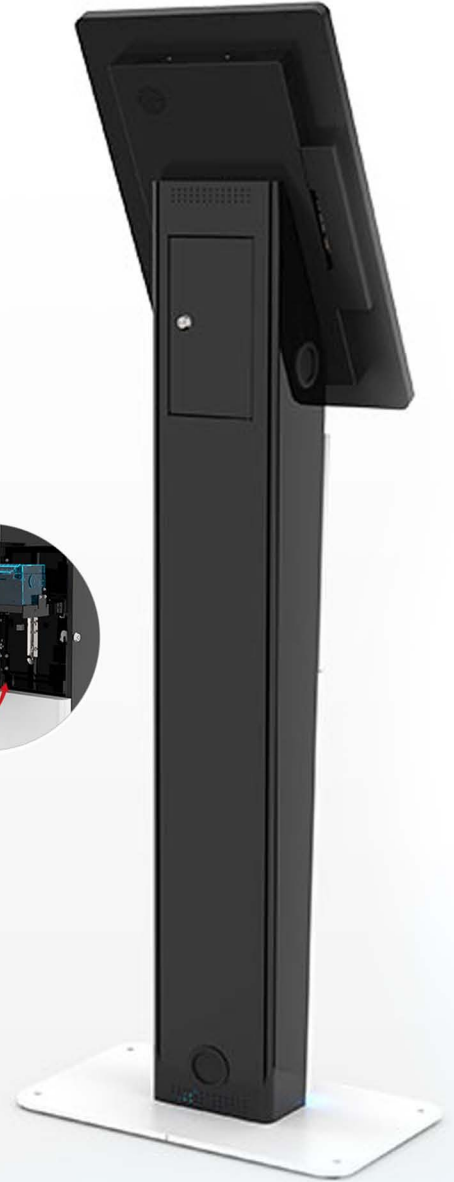

Manhattan

27" Self-Ordering kiosk




APPLICATIONS



Floor standing kiosk




27" Touchscreen
Support landscape or portrait mounting



Built-in Printer
80mm thermal printer with auto-cutter and front-open door



LED Atmosphere Lamp

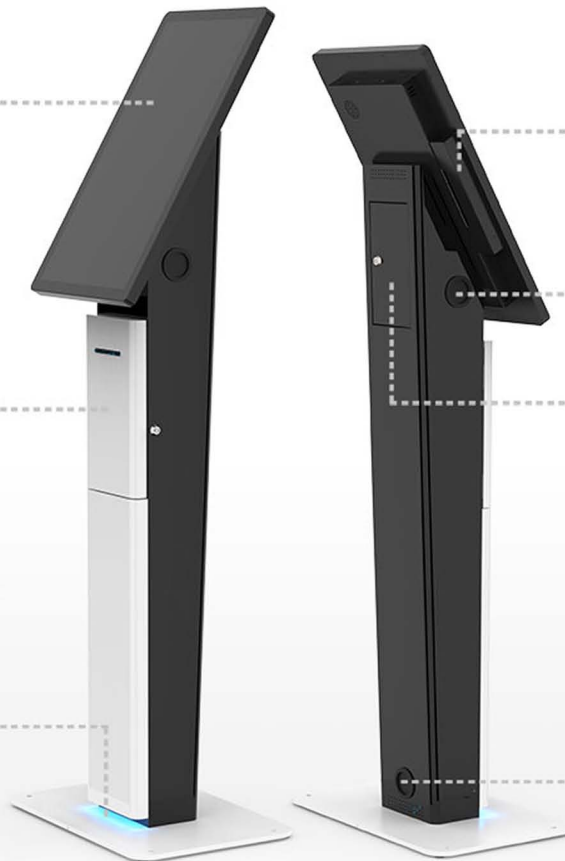

Cable Cover
Keep wires and switches from being damaged in public



Lockable Cable Compartment
For internal wiring



Wire Routing Hole

SPECIFICATIONS

OS Support			
Operating System	Windows10	Windows10	
CPU	J1900	i5-6200U	
System Memory	4G	8G	
Disk	64G	128G	
Interface			
Speaker	5W*2	5W*2	
Interface	USB*4/RJ45*1	USB*2/RJ45*1	
Network	Ethernet/WIFI	Ethernet/WIFI	
Touch screen			
Type	PCAP 10points	Response time	10ms
LCD			
Type	TFT-LCD	Contrast Ratio	3000:1
Screen Size	27"	Response time	12ms
Max Resolution	1920x1080	Viewing Angle	H178° V178°
Aspect Ratio	16:9	Display Colors	16.7M
Brightness	300cd/m2	Refresh Rate	60Hz
Panel Life	30000 hours		
Built-in Devices			
Printer	Thermal printer with auto cutter. Paller roller 80*150mm	Scanner	2D with MSR reader
Power			
Voltage	100-240VAC , 50/60HZ	Power Consumption	<50W
Enclosure			
Material	SPCC	Color: Front panel & base with glossy white. Side panel & back with glossy black	
Overall Size (mm)	L555×W375×H1634	Net Weight	43.5kg
With vesa mounting holes 75x75, 100x100mm , Rugged & durable metal construction, Stable free floor standing only, Support 21.5"-27" screen on portrait mounting , Bottom with LED Atmosphere lamp			
Application			
Working temperature	0~40°C	Storage temperature	-20~60°C
Working humidity	20%~80%	Storage humidity	10%~90%
Application	Indoor		

