

# 21.5 POS SYSTEM

Now, enjoy bigger and clearer  
The 21.5-inch wide display can realize the visual effects that users need through a high-quality screen.

## 21.5" WIDE DISPLAY




Slim bezel



Speaker

LED lamp




- FHD resolution
- Internal speaker
- Black Slim Bezel
- LED back light
  - Both landscape and portrait views are available
- Colors: White and Grey

CONTACT US

+30 2105778260  
+30 2310614212  
sales@ics.gr



[www.ics.gr](http://www.ics.gr)

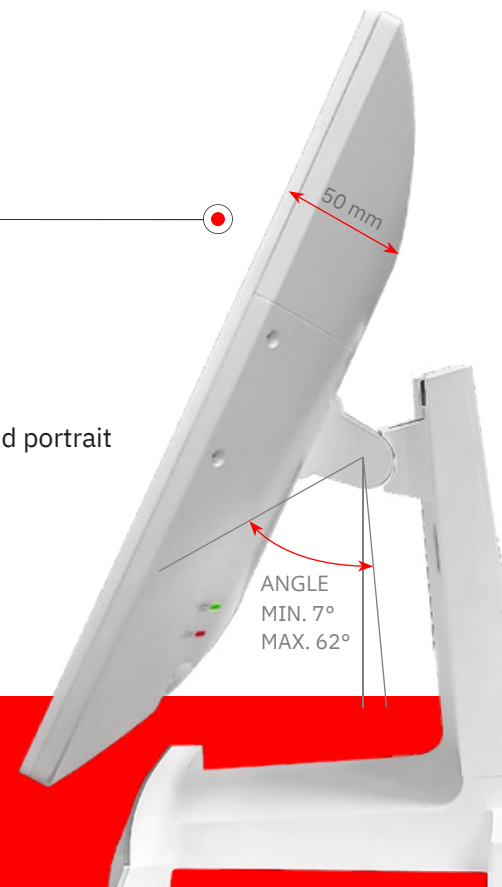

ANGLE  
MIN. 7°  
MAX. 62°

# VARIOUS I/O INTERFACE PROVIDED

- ✓ Various serial port
- ✓ Wide rooms between I/O ports
- ✓ Multi display available (3 Products)

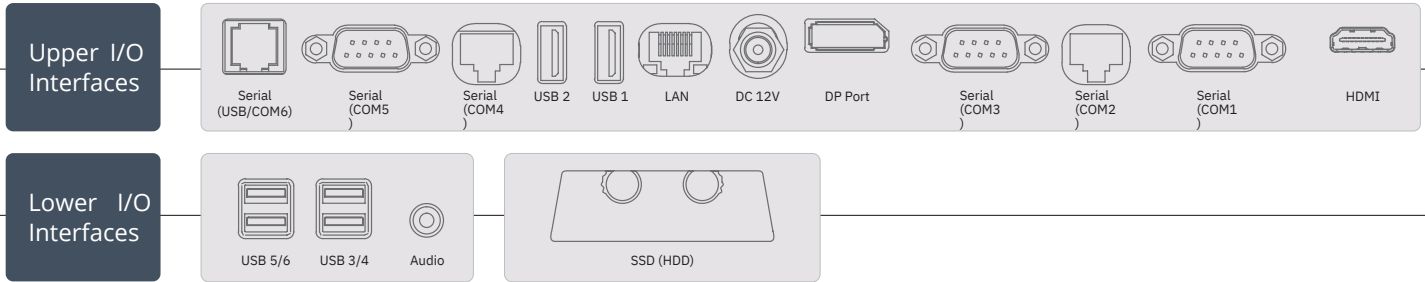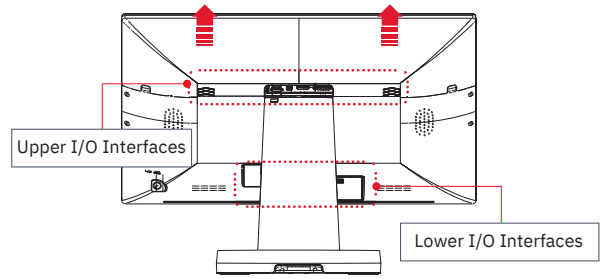

One Touch installation of 2nd display



Glass touch panel  
Reliable  
Vivid View



Tighten connection for power

## Specification

	S-200BAL	E-200B
<b>System</b>		
Processor	12th Generation Intel® Core™ Processors Intel® 1215U / Core i5-1235U / Core i7-1255U 2.0GHz/2.6GHz	Celeron® Quad-core Processor J6412 Core i3-1215U / Core i5-1235U / Core i7-1255U 2.0GHz/2.6GHz
Chipset / BIOS	Intel® Alder Lake SoC / AMI UEFI	Intel® Elkhart Lake SoC / AMI
Storage	2.5" SATA III SSD 128GB (SSD 256/512GB, optional)	
Memory	4GB SO-DIMM	
Graphics	Intel® Iris® Xe Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors
Multi Mointor	3 (# of Displays Supported) - up to 3 monitors (optional)	
OS	Windows 10 IoT Enterprise(64bit), Windows 11(64bit)	
<b>Display</b>		
Primary Display Type	21.5" WLED Backlight (1920 x 1080 Resolution / 16:9 Ratio)	
Touch	PCAP 10 Point Multi-touch	
<b>I/O Interfaces</b>		
<b>Rear Top &amp; Bottom Ports</b>		
USB	2 x USB 2.0 (Rear Top x 2), 1 x USB 2.0 (RJ11), 4 x USB 3.0 (Rear Bottom x 4)	
Serial	6 (DB9 x 3, RJ50 x 2, RJ11 x 1)	
Audio	1 x Audio-out / 3.5mm	
Extend Displays	1 x DP output, 1 x HDMI output (optional)	
LAN	1 x RJ45 (Base-T 10,100,1000m/bps Ethernet)	
Speaker	3W x 2	
<b>Peripheral Options</b>		
Secondary Display	<ul style="list-style-type: none"> <li>• LCD Type: 9.7" or 15" LCD (USB Port x 1)</li> <li>• Touch Monitor: 9.7" or 15" LCD with Capacitive Touch (USB Port x 1) - by single cable(no power &amp; USB cable)</li> </ul>	
Customer Display (CDP)	FSTN LCD Type(20 columns x 2 lines)	
Card Reader (MSR / SCR)	Smart Card Reader: ISO/IEC7816 EMV Level 1 / Magnetic Stripe Reader: ISO 7811 ID-1 All tracks *Interface: USB(HID) and RS232C(COM6)	
Dallas Reader	Dallas Reader(i-button): 6 characters / prefix and suffix *Interface: USB(HID) and RS232C(COM6)	
<b>Physical Dimension</b>		
Dimension (W x D x H)	524 x 251 x 386 (mm)	
Weight	6.5 kg	
<b>Environment</b>		
Power Supply	DC 12V/7A (AC 100V~240V, 84W) 12V DC input (AC 100V~240V, 60W)	
Temperature	Operating Temp : 0~40°C / Storage Temp : -20~60°C Humidity: 20% to 90%	
Certifications	CE, FCC, KC	

\* Specifications are subject to change without prior notice.