

# P2C 250 Series

Designed as considering user's convenience



ΜΠΟΡΕΙΤΕ ΝΑ ΕΠΙΛΕΞΕΤΕ ΚΑΙ  
ΝΑ ΧΡΗΣΙΜΟΠΟΙΗΣΕΤΕ ΔΙΑΦΟΡΟΥΣ ΣΥΝΔΥΑΣΜΟΥΣ




CPU  
**Intel- i3/i5**



MEMORY  
**32GB (Max)**



SSD  
**512GB (Max)**

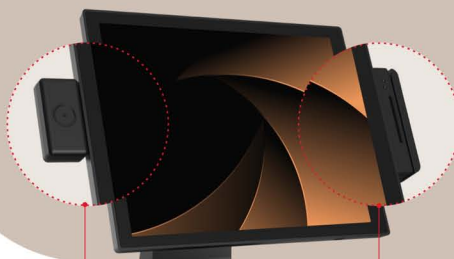

Dallas Reader / RFID Reader

MSR / SCR



VFD



9.7 inch  
(1024 x 768)

2nd LCD Display




15 inch  
(1024 x 768)




# Specification

## S-250

<b>System</b>	
Processor	Intel Core i5-1235U 12th Gen 1.50GHz Fanless
Chipset / BIOS	Intel® Kaby Lake SoC / AMI
Storage	128GB 2.5" SSD up to 512GB
Memory	1 SLOT x 8GB DDR4 SODIMM 3200MHz x 1 (Max 32GB, optional)
Resolution	(FHD, 1920 x 1080 Resolution / 16:9 Ratio/ 250cd/m <sup>2</sup> (Typ))
Graphics	Intel® HD Graphics 520 / Intel® HD Graphics 620
Multi Mointor	3 (# of Displays Supported) - up to 3 monitors (optional)
Expansion Slot	1 x mini PCI-e
OS	WINDOWS 10 IOT (64BIT) / WINDOWS 10 PRO
<b>Display</b>	
Primary Display Type	15.6" FHD LED Backlight PCAP 10 Point Multi-touch
Touch	True-Flat Capacitive 10 Point Multi-touch
<b>I/O Interfaces</b>	
<b>Rear Top &amp; Bottom Ports</b>	
USB	6 x USB (4 x USB 3.0 , 2 x USB 2.0)
Serial	1 x RJ45 (1000m/bps Ethernet)
Audio	1 x Audio-out / 3.5mm
Secondary Display	1 x DisplayPort (included 1 x USB 2.0 / Power Delivery +12V) *Can be used for HDMI and Standard DVI, VGA monitor by passive cable.
Speaker(optional)	1W x 1
<b>Peripheral Options</b>	
Secondary Display  DisplayPort	<ul style="list-style-type: none"> <li>LCD Type: 9.7" or 15" LCD (USB Port x 1)</li> <li>Touch Monitor: 9.7" or 15" LCD with Capacitive Touch (USB Port x 1) - by single cable(no power &amp; USB cable)</li> <li>Standard Monitor: supported standard DP, HDMI, DVI, VGA monitor by change monitor cable)</li> <li>Standard and Powered DP MST Hub: supported standard or powered(customized) DP MST Hub.</li> </ul>
Customer Display (CDP)	VFD Type (Alphabet & Numeric, 20 characters x 2 lines)
Card Reader (MSR / SCR)	Smart Card Reader: ISO/IEC7816 EMV Level 1 / Magnetic Stripe Reader: ISO 7811 ID-1 All tracks *Interface: USB(HID) and RS232C(COM6)
Dallas Reader	Dallas Reader(i-button): 6 characters / prefix and suffix *Interface: USB(HID) and RS232C(COM6)
<b>Physical Dimension</b>	
Dimension (W x D x H)	362 x 237 x 357 (mm) / 14.2 x 9.3 x 14.0 (inch)
Weight	4.5 (Kg) / 9.9 (lb)
<b>Environment</b>	
Power Supply	DC 12V/5A (AC 100V~240V, 60W)
Temperature	Operating: 0 ~ 50°C at 10% to 90% humidity
Certifications	CE, FCC, KC, CB

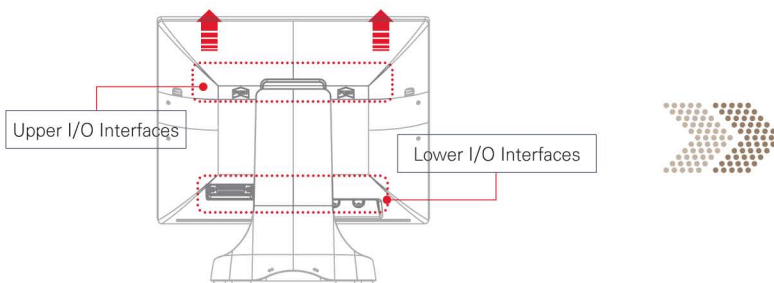\*Specifications are subject to change without prior notice.



-  Various serial port
-  Wide rooms between I/O ports
-  Multi display available (3 Products)

Upper I/O Interfaces













Lower I/O Interfaces



