

DENSO
DENSO WAVE

HEALTHCARE SCANNER
SC1-QB



Seamless Design.*
Easy to clean.



*Patent pending.

SC1-QB HEALTHCARE SCANNER

Unmatched in the industry.

The all-new SC1-QB brings needed breakthrough for health care settings. **The smooth surface is designed for ease of wipe-down all will withstand rigorous anti-bacterial cleaning.** Lightweight, quick-charging, and powerful, it offers superior performance in any clinical or office setting as well as in restaurants, retail, and other shared environments.



Smooth. Seamless. Sanitary.

Due to the innovative design* without crevices and screw holes, microbes and pathogens no longer stand a chance. The smooth surface of the SC1-QB is easy to clean and ideal for the daily use of chemical disinfection commonly used in healthcare and other industries.



Wireless charging in 3 minutes or less.

Simply place the SC1-QB on its compact, magnetic charging station. The scanner's internal capacitor is fully charged in just three minutes or less. Dozens of scans are possible after just 60 seconds of charging. What's more, unlike conventional batteries, the internal capacitor never needs to be replaced.




Light as a feather but still robust.

With a weight of just 130 grams, the SC1-QB is as light as a feather. Its housing is nevertheless so stable that it can easily withstand multiple drops from a height of up to 2 metres. Equipped with IP65, it is also dust and water resistant.

SPECIFICATIONS

SC1-QB			
Type	Area Scanner		
Scanner	Scanne Functions	2D Codes	QR Code, SQRC, Micro QR Code, DataMatrix(ECC200), PDF417, MicroPDF417, MaxiCode, Aztec, GS1 Composite
		Barcodes	EAN-13/8 (JAN-13/8), UPC-A/E, UPC/EAN (with add-on), Interleaved 2 of 5, Standard 2 of 5, Codabar (NW-7), CODE39, CODE93, CODE128, GS1-128 (EAN-128), GS1 DataBar (RSS)
	Minimum Resolution	2D Codes	0,127 mm
		Barcodes	0,076 mm
	PCS Value	More than 0,3	
	Marker	LED	
	Angle	±50°	
	Skew Angle	360°	
Scanning Confirmation	LED Light (blue, green and red), Sound and Vibration		
Communication Interface	Method	Bluetooth Ver. 5.0 Low Energy	
Power	Power Supply	Capacitor Battery (Wireless charging on base (sold separately))	
	Charging Time	approx. 3 minutes	
	Operating Time	approx. 30 minutes (1 scan per 5 sec.)	
Operating Environment	IP Rate	IP65	
	Temperature	-20 to 50°C	
	Humidity	10 to 90 %RH (non-condensing)	
	Drop Resistance	2.0m (onto concrete) / 0.5m x 2,000 times	
Weight	approx. 130 g		

DIMENSIONS

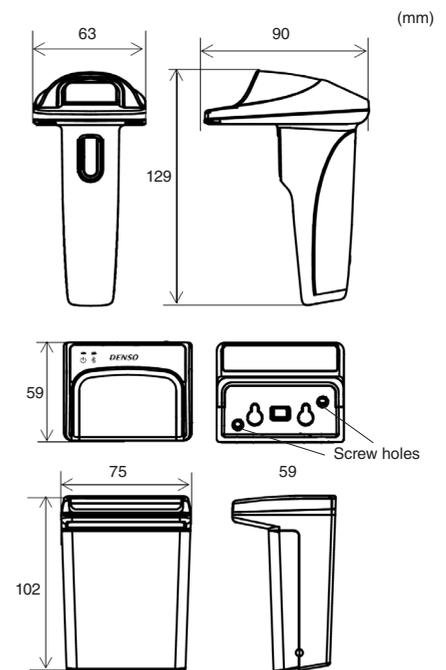

ACCESSORIES (sold separately)

Charger

- USB Charger CH-1CW (with Bluetooth Interface)



DENSO

DENSO WAVE EUROPE GmbH

Parsevalstr. 9 A
D-40468 Düsseldorf
☎ +49 211 540 138 40
✉ info@denso-wave.eu

For more information, please visit our website.

www.denso-wave.eu

