


POS PRINTER



SLK-TE322 II


- Energy star qualified for power efficiency
- High speed printing : 220mm/sec
- Paper width adjustable 50~82.5mm
- ESC/POS command compatible

APPLICATIONS

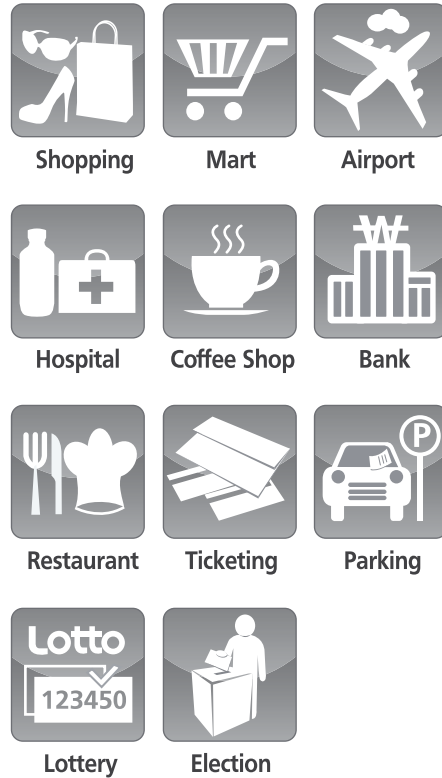

EASY-LOAD DESKTOP THERMAL POS PRINTER

SLK-TE322 II



MODEL		SLK-TE322 II
PRINTING	METHOD	Direct Thermal
	SPEED	Max. 220mm/sec
	WIDTH	72mm(512 Dots/Line)
PAPER	RESOLUTION	180DPI / 203DPI(Optional)
	TYPE	Thermal Receipt Paper / Linerless(Optional)
	WIDTH	50mm ~ 82.5mm
RELIABILITY	THICKNESS	0.06mm ~ 0.09mm
	ROLL DIAMETER	Max. ø 80.0mm
	ROLL CORE INNER	12.5mm ± 0.5mm
AUTO CUTTER	TPH LIFE	160km
	MCBF	60,000,000Lines
SENSOR	STANDARD	Paper End, Paper Low, Cover Open
	OPTION	Black Mark
INTERFACE	USB (B type) plus one more card selectable (Serial, Parallel, Wi-Fi, Ethernet, Bluetooth(iOS))	
EMULATION	ESC/POS Command Compatible	
DRIVER	Windows Driver(10, 2012, 8, 7, 2008, VISTA, 2003, XP, 32bit & 64bit), Windows CE & Mobile Driver & SDK(CE 4.2 ~, Mobile 5.0 ~), Linux Driver, Mac Driver, OPOS Driver, JavaPOS Driver, iOS SDK, Android(2.1 ~) SDK, Windows SDK	
POWER	TYPE	External SMPS
	AC	100 ~ 240Vac 50/60 Hz
TEMPERATURE	DC	24Vdc / 1.75A
	OPERATION	0 ~ 45°C
DIMENSION	STORAGE	-20 ~ 60°C
		156 x 203 x 155 mm (W x D x H)
WEIGHT	1.7kg	
COLOR	Cool grey, Ivory	

