

SRP-330III

3-inch Thermal POS Printer



Retail



Restaurants & Bars




Ticketing



Kiosk

Functional and Affordable

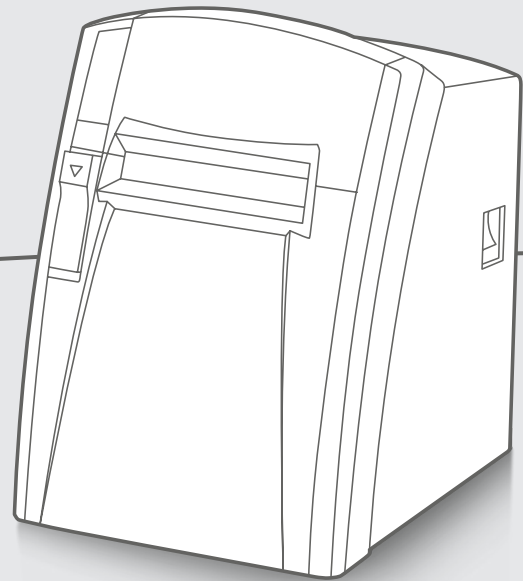

Triple Interface



Dual Interface

Multiple Interface Choices

- All in one Plus™ Interface
- Triple Interface: USB V2.0 FS + Ethernet + Serial
- Dual Interface: USB V2.0 FS + Serial
USB V2.0 FS + Parallel
USB V2.0 FS + Dual Serial



User-Friendly Design

- Auto media width switch with 2-inch (58 mm) partition
- Paper saving mode, reducing the length of a receipt by up to 25%
- 180 or 203 dpi options

250 mm/sec



Reliable Printing Performance

- Fast printing speeds up to 250 mm/sec
- Energy Star certified

SRP-330III

3-inch Thermal POS Printer

Specifications

Print Characteristics

Print Method

Direct Thermal

Print Speed

SRP-330III: Up to 250 mm/sec
 SRP-332III: Up to 250 mm/sec

Print Resolution

SRP-330III: 180 dpi
 SRP-332III: 203 dpi

Print Width

Up to 72 mm

Sensor

Paper End, Cover Open

Media Characteristics

Media Type

Receipt

Media Width

80 mm
 Optional 58 mm

Media Roll Diameter

Up to 80 mm

Media Thickness

0.05 ~ 0.08 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (W x D x H)

145 x 195 x 146 mm
 (5.72 x 7.79 x 5.74 inch)

Weight

1.6 kg (3.52 lbs.)

Electrical

EnergyStar Certified,
 External Power Adaptor 100-240V AC, 50/60Hz

Drawer Port

2 ports (Via y-type adaptor)

Performance Characteristics

Memory

128 Mb SDRAM, 64 Mb Flash

NV Image Memory

768 Kbytes (Mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

- ① USB V2.0 FS + Ethernet + Serial
- ② USB V2.0 FS + Serial
- ③ USB V2.0 FS + Parallel
- ④ USB V2.0 FS + Dual Serial

Environment Characteristics

Temperature

Operating: 0 ~ 40 °C (32 ~ 104 °F)
 Storage: -20 ~ 60 °C (-4 ~ 140 °F)

Humidity

Operating: 10 ~ 80 % RH
 Storage: 10 ~ 90 % RH

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver
 OPOS / JPOS Driver
 Linux / Mac CUPS Driver
 Virtual COM USB / Ethernet Driver
 Utility Program
 Network Auto Installer

SDK / Plugin

Android / iOS / Windows SDK
 Linux SDK
 Xamarin SDK
 Web Print SDK
 Cordova Plugin

Application

mPrint App (Android, iOS)

Fonts / Graphics / Symbologies

Character Size

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24
 KOR, CHN, JPN: 24 x 24

Characters Per Line

SRP-330III: Font A: 42 Font B, C: 56
 KOR, CHN, JPN: 21

SRP-332III: Font A: 48 Font B, C: 64
 KOR, CHN, JPN: 24

Character Sets

Alphanumeric: 95
 Extended Graphics: 128 x 35 page
 International: 32

Graphics

Supporting user-defined fonts, graphics, formats, and logos

Barcode Symbologies

1D: Coda Bar, Code39, Code93, Code128, EAN-8,
 EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR Code

Accessories

Standard

2-inch Partition (58 mm), USB A-B Cable 1.8 m

Optional

External buzzer, B-Melodist,
 Serial Cable (9-9/25-9 pin), Parallel Cable

