

Desktop Terminal

# SUNMI D2s KDS Kitchen Display System New

Streamline your kitchen operations for improved customer satisfaction.



## Boosted BOH efficiency.

Go paperless and boost your restaurant BOH efficiency with SUNMI D2s KDS. Orders taken in the front of the house (FOH) will be directly sent to the back of the house (BOH) KDS screens. No more wrong or lost orders, and higher efficiency.

## Touch, and done.

Simply check tickets on the 15.6" FHD capacitive multi-touch screen and tap to change ticket status, with a wet hand or a gloved hand.



## Sealing protection.

With a sealed enclosure, D2s KDS is IP55 waterproof and easily cleanable. It is perfectly designed for hot, humid and greasy kitchen environments.

## Painless installation, easy operations.


VESA mount compatible. Wall-mounted, pole-mounted, arm mounted, your kitchen, your choice.

You can set D2s KDS to auto start once connected to a power supply.

Power over Ethernet\*. Reduce cabling needs by connecting to network and power the device with one cable.

Vertical or horizontal. Orient the KDS screen to suit your kitchen.

\*POE Switch is required

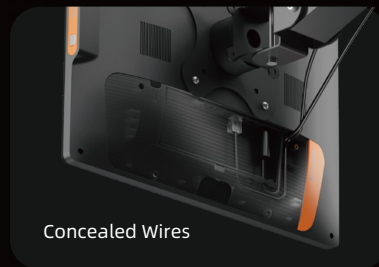

Concealed Wires



Rounded Corners

## SUNMI D2s KDS Tech Specs

<b>Model Approved</b> L3561	<b>OS</b> SUNMI OS (*based on Android 11)	<b>CPU</b> Cortex-A55, 1.8GHz	<b>Memory</b> 2GB RAM+8GB ROM	<b>Display</b> 15.6" FHD, 1920*1080 Capacitive multi-touch screen
<b>Camera</b> Built-in 2M FF camera (optional)	<b>Speaker</b> 1* 3W	<b>Wi-Fi</b> 2.4GHz/5GHz IEEE 802.11 a/b/g/n/ac	<b>Bluetooth</b> Bluetooth2.1/3.0/4.2 BLE	<b>Ethernet</b> LAN 100M POE (optional)
<b>Button</b> 1* Power (lock screen) button	<b>External Memory Card</b> 1* MicroSD (TF) Up to 64GB	<b>Ports</b> 4* USB Type A port 1* RJ11 port 1* Switch for auto start 1* RJ45 LAN 1* 3.5mm audio jack 1* Power port 1* Micro-USB debug port	<b>Power Adapter</b> Input: AC100 ~ 240V/1.5A Output: DC 24V/1.5A or Input: AC100 ~ 240V/0.7A Output: DC 24V/1A	<b>Dimensions (L*W*H)</b> 381.51*251.21*40.58mm
<b>Weight</b> 1.69kg	<b>Environment</b> Working temp.: 0°C~40°C Storage temp.: -20°C~60°C			

1.The usable memory may be less than the installed memory.  
2.All specifications are subject to change without (prior) notice.