

## 10.4" Rimless USB LCD Monitor



New Capacitive Touch keys control design provide high durability of operation, also with a thin & whole flat front panel gives an elegant and compact appearance.

### Features

1. Rimless front bezel design
2. Low power consumption with LED backlight
3. Sleek surface throughout monitor's appearance
4. VESA 75 x 75 mm wall mounting standard
5. Integrated protection glass (P104UG) or 5 wires Resistive touch (P104UR)
6. USB Powered

### Specification

Model	P104UG / P104UR
Cabinet Color	Black or White
Cover Lens	Mitsubishi PMMA Hardness > 5H (JIS D0202), T > 93% (P104UG) 5 wires Resistive touch (P104UR)
Display Type	10.4" diagonal TFT active matrix with LED backlight
Recommended Resolution	800 x 600
Panel Brightness	300 cd/m <sup>2</sup> (typ.)
Contrast Ratio	500:1 (typ.)
Viewing Angle	110° (H) / 150° (V)
I/O Connectivity	Mini USB x 1, DC 12V in
DC Power	Optional power adaptor


\* Specification is subject to be changed without prior notice.

### Applications:


SOHO/Chain stores/Hospitality/POS Customer display



### USB Multiple Display w/NB

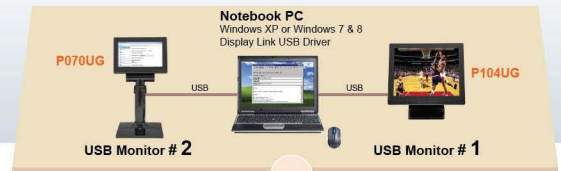


### USB Monitor Application w/PC

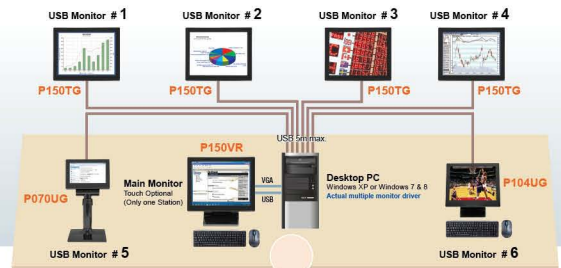

All USB Monitors are optional, and function is assigned by User.  
Only six USB Monitors could be connected in a PC system.  
All USB Monitors are extended-display of Main Monitor.

### I/O indication

#### P104UG / P104UR

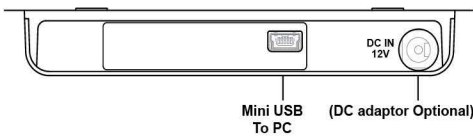

### Dimension (unit: mm)

#### Touch Stand (Optional)

